

XQ-100301E70-2 / XQ-100302E70-2 / XQ-100303E70-2 / XQ-100304E70-2


型号	Model Code	XQ-100301E70-2	XQ-100302E70-2	XQ-100303E70-2	XQ-100304E70-2
功率	Power	2x6W	2x6W	2x6W	2x6W
开孔	Cut out	130xØ68mm	130xØ68mm	130xØ68mm	130xØ68mm
光源	Light Source	CREE	CREE	CREE	CREE
尺寸	Size(DxH)	140xØ80x81mm	140xØ80x84mm	140xØ80x81mm	140xØ80x84mm

眩光值	UGR	<19	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	618 lm/680 lm/711 lm/754 lm	618 lm/680 lm/711 lm/754 lm	569 lm/625 lm/654 lm/694 lm	569 lm/625 lm/654 lm/694 lm
寿命	Life time	50000 h	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

配光参数 Photometric

Beam Angle 15° 6W 3000K

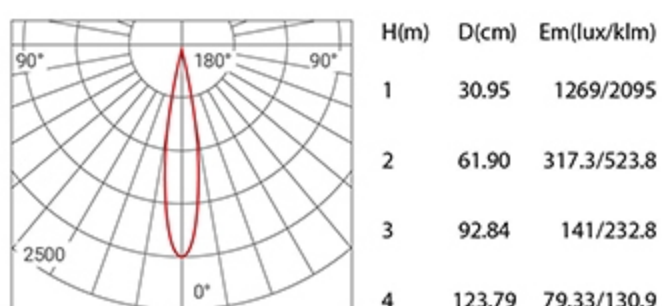

Beam Angle 24° 6W 3000K

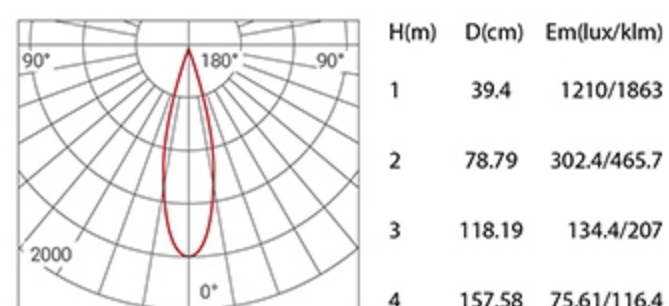

Beam Angle 38° 6W 3000K

