


Colour:



Optional:

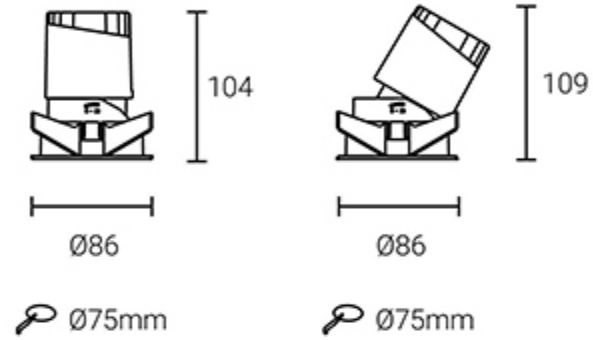

## XQ-100301E75 / XQ-100302E75 / XQ-100303E75 / XQ-100304E75


型号	Model Code	XQ-100301E75	XQ-100302E75	XQ-100303E75	XQ-100304E75
功率	Power	12W	12W	12W	12W
开孔	Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm
光源	Light Source	CREE	CREE	CREE	CREE
尺寸	Size(DxH)	Φ86x104mm	Φ86x109mm	Φ86x104mm	Φ86x109mm

眩光值	UGR	<19	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	664 lm/731 lm/764 lm/810 lm	664 lm/731 lm/764 lm/810 lm
寿命	Life time	50000 h	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

## 配光参数 Photometric

Beam Angle 15° 12W 3000K

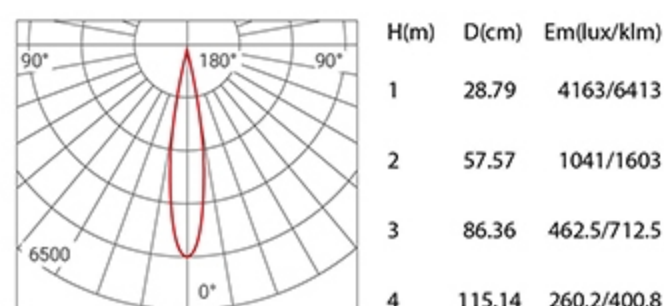

Beam Angle 24° 12W 3000K

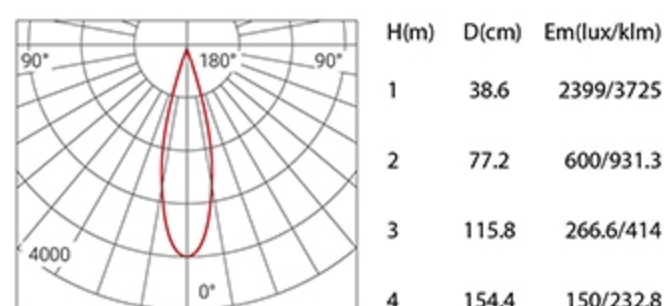

Beam Angle 38° 12W 3000K

