





Colour:



163x80mm



173x89

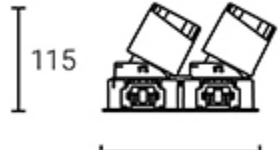

173x89



215x77



215x77

Optional:



XQ-100302E82-2 / XQ-100303E82-2 / XQ-100302T82-2 / XQ-100303T82-2


型号	Model Code	XQ-100302E82-2	XQ-100303E82-2	XQ-100302T82-2	XQ-100303T82-2
功率	Power	2x12W	2x12W	2x12W	2x12W
开孔	Cut out	163x80mm	163x80mm	163x80mm	163x80mm
光源	Light Source	CREE	CREE	CREE	CREE
尺寸	Size(DxH)	173x89x115mm	173x89x120mm	215x77x115mm	215x77x120mm

眩光值	UGR	<19	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	1446 lm/1591 lm/1663 lm/1764 lm	1446 lm/1591 lm/1663 lm/1764 lm	1446 lm/1591 lm/1663 lm/1764 lm	1446 lm/1591 lm/1663 lm/1764 lm
寿命	Life time	50000 h	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

配光参数 Photometric

Beam Angle 15° 12W 3000K

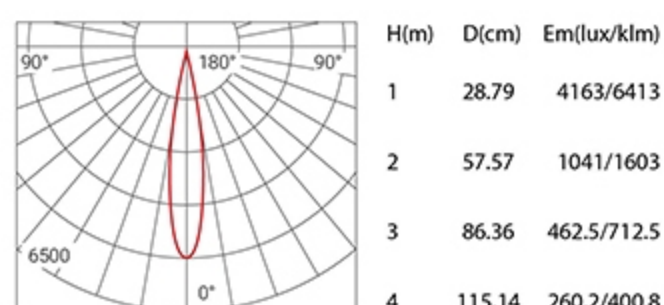

Beam Angle 24° 12W 3000K

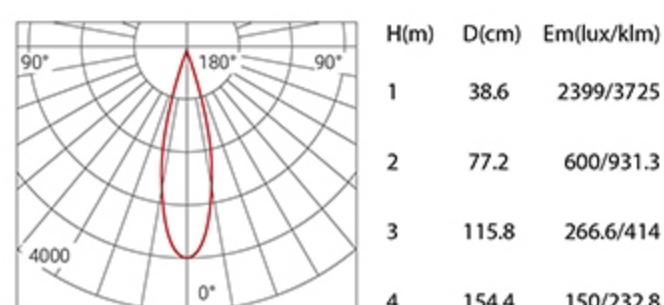

Beam Angle 38° 12W 3000K

