

## XQ-100302E82 / XQ-100303E82 / XQ-100302T82 / XQ-100303T82


型号	Model Code	XQ-100302E82	XQ-100303E82	XQ-100302T82	XQ-100303T82
功率	Power	12W	12W	12W	12W
开孔	Cut out	82x82mm	82x82mm	82x80mm	82x80mm
光源	Light Source	CREE	CREE	CREE	CREE
尺寸	Size(DxH)	89x89x115mm	89x89x120mm	131x78x115mm	131x78x120mm

眩光值	UGR	<19	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm	722 lm/794 lm/830 lm/881 lm
寿命	Life time	50000 h	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

## 配光参数 Photometric

Beam Angle 15° 12W 3000K

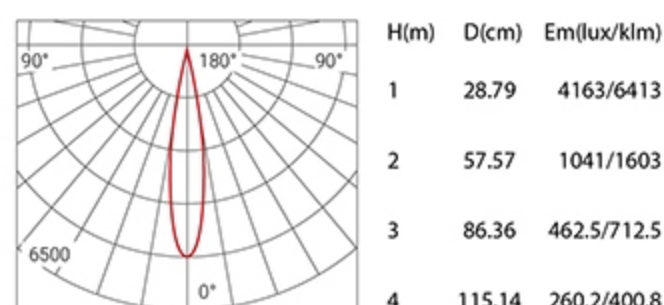

Beam Angle 24° 12W 3000K

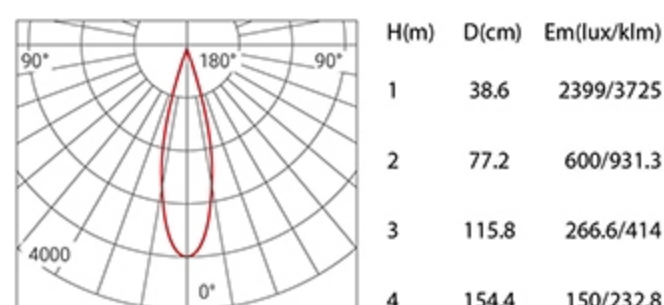

Beam Angle 38° 12W 3000K

