

XQ-100301E70-3 / XQ-100302E70-3 / XQ-100303E70-3 / XQ-100304E70-3


| 型号 | Model Code | XQ-100301E70-3 | XQ-100302E70-3 | XQ-100303E70-3 | XQ-100304E70-3 |
|----|--------------|----------------|----------------|----------------|----------------|
| 功率 | Power | 6Wx3 | 6Wx3 | 6Wx3 | 6Wx3 |
| 开孔 | Cut out | 190xØ68mm | 190xØ68mm | 190xØ68mm | 190xØ68mm |
| 光源 | Light Source | CREE | CREE | CREE | CREE |
| 尺寸 | Size(DxH) | 200x80x81mm | 200x80x84mm | 200x80x81mm | 200x80x84mm |

| | | | | | |
|------|------------|-------------|-------------|-------------|-------------|
| 眩光值 | UGR | <19 | <19 | <19 | <19 |
| 显色指数 | CRI | ≥80/≥90 | ≥80/≥90 | ≥80/≥90 | ≥80/≥90 |
| 光束角 | Beam angle | 15°/24°/38° | 15°/24°/38° | 15°/24°/38° | 15°/24°/38° |


| | | | | | |
|------|-----------|--------------------------------|--------------------------------|------------------------------|------------------------------|
| 色温 | CCT | 2700K/3000K/4000K/5000K | 2700K/3000K/4000K/5000K | 2700K/3000K/4000K/5000K | 2700K/3000K/4000K/5000K |
| 光通量 | Lumens | 926 lm/1019 lm/1065 lm/1130 lm | 926 lm/1019 lm/1065 lm/1130 lm | 852 lm/937 lm/978 lm/1039 lm | 852 lm/937 lm/978 lm/1039 lm |
| 寿命 | Life time | 50000 h | 50000 h | 50000 h | 50000 h |
| 防护等级 | IP | IP20 / IP65 | IP20 / IP65 | IP20 / IP65 | IP20 / IP65 |

配光参数 Photometric

Beam Angle 15° 6W 3000K

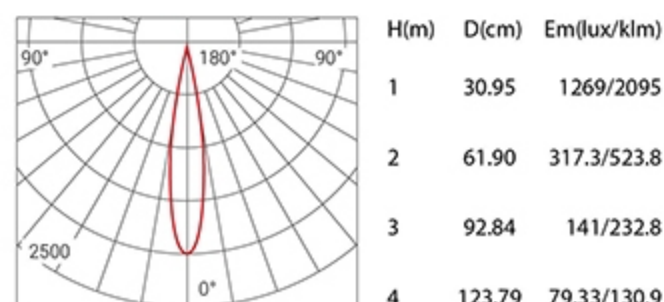

Beam Angle 24° 6W 3000K

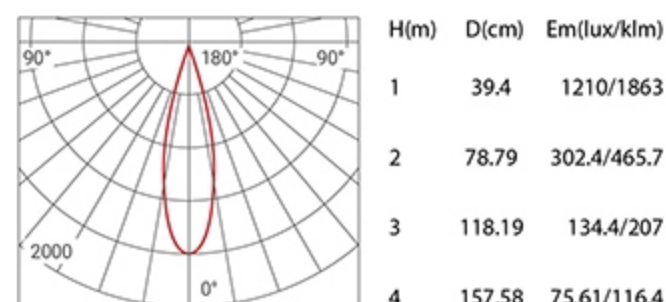

Beam Angle 38° 6W 3000K

