

## XQ-100301P120 / XQ-100302P120 / XQ-100305P120


型号	Model Code	XQ-100301P120	XQ-100302P120	XQ-100305P120
功率	Power	30W	30W	30W
开孔	Cut out	Φ120mm	Φ120mm	Φ120mm
光源	Light Source	CREE	CREE	CREE
尺寸	Size(LxWxH)	133x133x145mm	133x133x155mm	133x133x155mm

眩光值	UGR	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	1502 lm/1652 lm/1727 lm/1832 lm	1502 lm/1652 lm/1727 lm/1832 lm	1277 lm/1404 lm/1468 lm/1558 lm
寿命	Life time	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65

## 配光参数 Photometric

Beam Angle 15° 30W 3000K

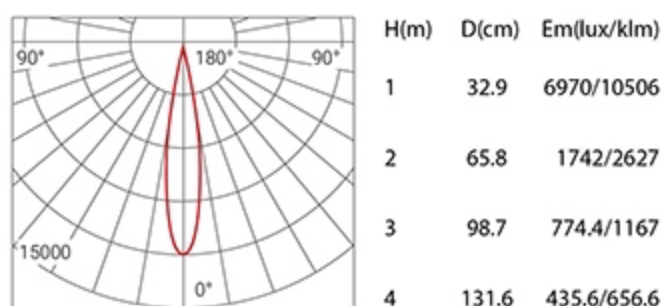

Beam Angle 24° 30W 3000K

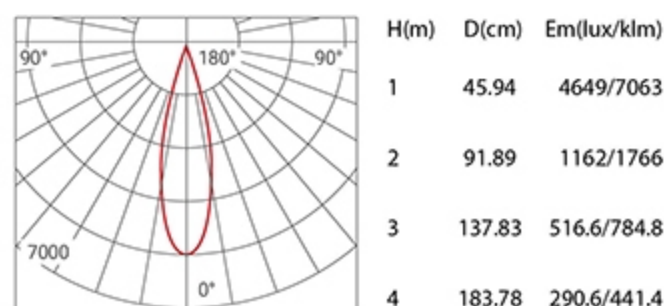

Beam Angle 38° 30W 3000K

