

XQ-100301E95 / XQ-100302E95 / XQ-100303E95 / XQ-100304E95


型号	Model Code	XQ-100301E95	XQ-100302E95	XQ-100303E95	XQ-100304E95
功率	Power	20W	20W	20W	20W
开孔	Cut out	Φ95mm	Φ95mm	Φ95mm	Φ95mm
光源	Light Source	CREE	CREE	CREE	CREE
尺寸	Size(DxH)	Φ106x119mm	Φ106x126mm	Φ106x119mm	Φ106x126mm

眩光值	UGR	<19	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	1023 lm/1125 lm/1176 lm/1248 lm	1023 lm/1125 lm/1176 lm/1248 lm	941 lm/1035 lm/1082 lm/1148 lm	941 lm/1035 lm/1082 lm/1148 lm
寿命	Life time	50000 h	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

配光参数 Photometric

Beam Angle 15° 20W 3000K

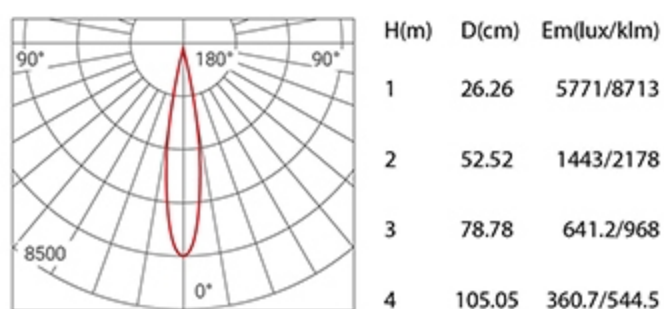

Beam Angle 24° 20W 3000K

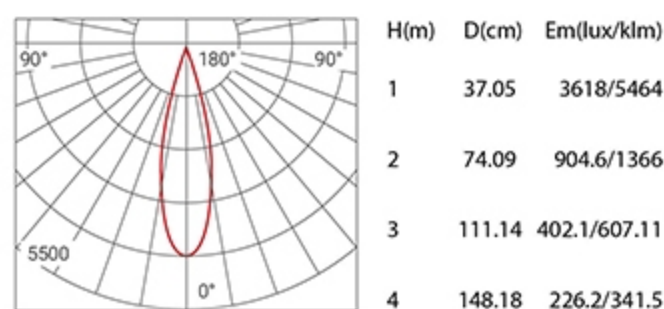

Beam Angle 38° 20W 3000K

