

XQ-100301E70-4 / XQ-100302E70-4 / XQ-100303E70-4 / XQ-100304E70-4


型号	Model Code	XQ-100301E70-4	XQ-100302E70-4	XQ-100303E70-4	XQ-100304E70-4
功率	Power	6Wx4	6Wx4	6Wx4	6Wx4
开孔	Cut out	130x130mm-R34	130x130mm-R34	130x130mm-R34	130x130mm-R34
光源	Light Source	CREE	CREE	CREE	CREE
尺寸	Size(DxH)	140x140x81mm	140x140x84mm	140x140x81mm	140x140x84mm

眩光值	UGR	<19	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	1234 lm/1357 lm/1419 lm/1505lm	1234 lm/1357 lm/1419 lm/1505lm	1135 lm/1249 lm/1306 lm/1385 lm	1135 lm/1249 lm/1306 lm/1385 lm
寿命	Life time	50000 h	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

配光参数 Photometric

Beam Angle 15° 6W 3000K

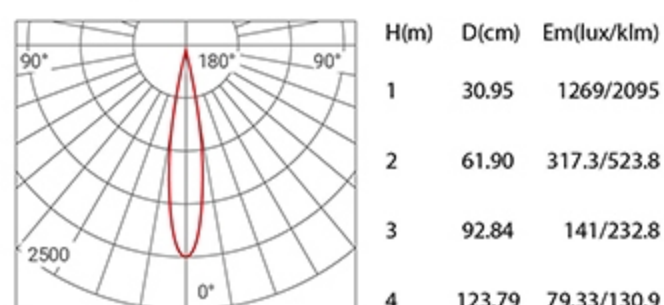

Beam Angle 24° 6W 3000K

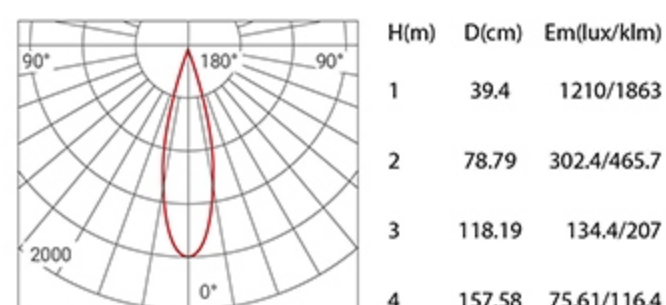

Beam Angle 38° 6W 3000K

