

XQ-100301E50 / XQ-100302E50 / XQ-100303E50 / XQ-100304E50


型号	Model Code	XQ-100301E50	XQ-100302E50	XQ-100303E50	XQ-100304E50
功率	Power	6W	6W	6W	6W
开孔	Cut out	Φ50mm	Φ50mm	Φ50mm	Φ50mm
光源	Light Source	CREE	CREE	CREE	CREE
尺寸	Size(DxH)	Φ60x75mm	Φ60x78mm	Φ60x75mm	Φ60x78mm

眩光值	UGR	<19	<19	<19	<19
显色指数	CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角	Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°


色温	CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
光通量	Lumens	308 lm/338 lm/354 lm/376 lm	308 lm/338 lm/354 lm/376 lm	283 lm/312 lm/326 lm/346 lm	283 lm/312 lm/326 lm/346 lm
寿命	Life time	50000 h	50000 h	50000 h	50000 h
防护等级	IP	IP20 / IP65	IP20 / IP65	IP20 / IP65	IP20 / IP65

配光参数 Photometric

Beam Angle 15° 6W 3000K

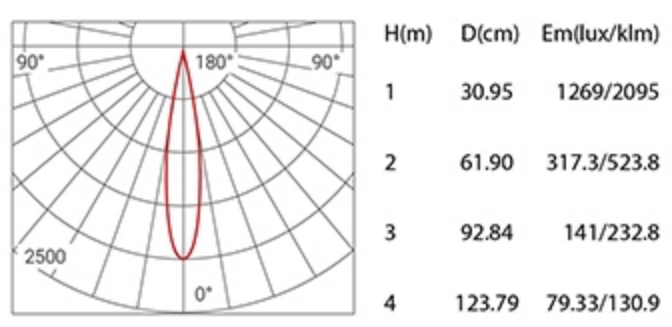

Beam Angle 24° 6W 3000K

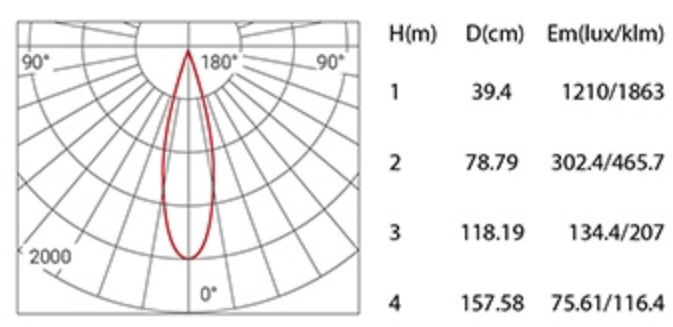

Beam Angle 38° 6W 3000K

